

FW update SOP

315QHD165

Required Components


- PC or Laptop with Microsoft Windows OS 10+.
- USB Flash Drive with FAT32 or NTFS
- Downloaded FW file from Corsair Website

Caution


- If the monitor loses power during the update process, it will be reset to its default condition. To restart the update process, please unplug the power connector and plug it back, turn on the monitor, and repeat the update process.

CORSAIR XENEON 315QHD165 UPDATE PROCESS - 1

1. Prepare an USB flash drive and format the disk with FAT32 or NTFS.
2. Download and save the USB firmware upgrade bin file in USB flash drive root directory.
3. Power on monitor and connect with a video source. Plug USB flash drive into monitor "SERVICE" port.

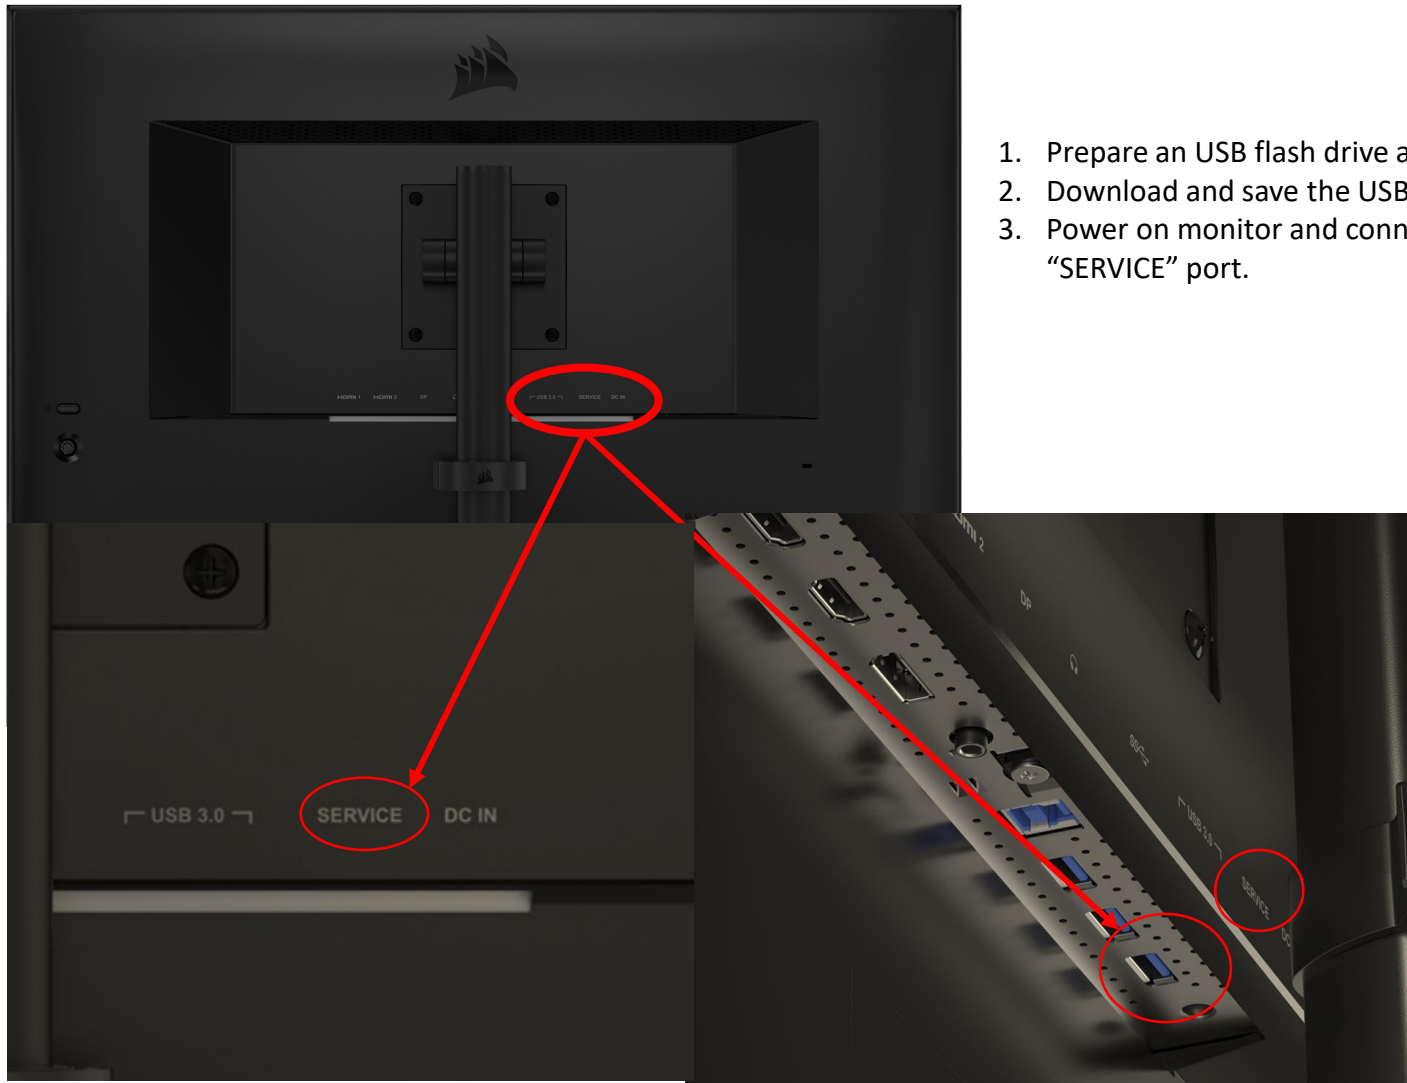

CORSAIR XENEON 315QHD165 UPDATE PROCESS - 2

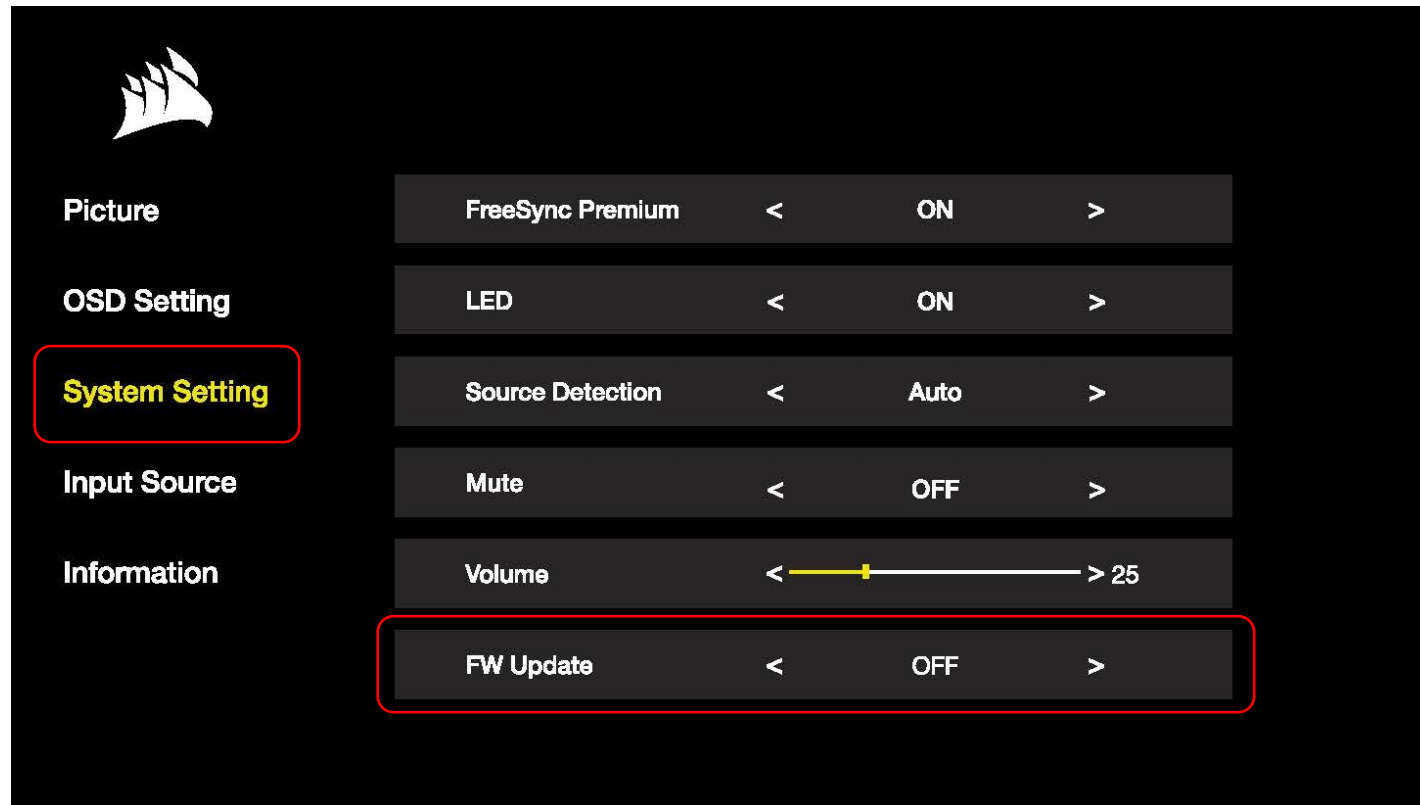

4. Select "FW Update" option to "ON" in OSD (System Setting / FW Update).
5. Monitor will start firmware update process automatically. It will take around one minute.
6. After update process finish, OSD will show the message below down and please follow the instruction.
7. "Firmware Update complete"
8. "Please un-plug power supply for 5 seconds, then re-plug and power on monitor"

Corsair XENEON 315QHD165

FW Release History

FW Version	Description
V 101	MP Release
V 102	1. Audio out performance improvement 2. OSD behavior adjustment